


POWATHERM - POWACOUSTIC - ACOUSTIC LAGGING

Part Number	Size
25PAC013510KG3M	10KG/M2 with WAVE FOAM 3 mtr x 1350mm wide Roll
25PAC01358KG3M	8KG/M2 with WAVE FOAM 3 mtr x 1350mm wide Roll
25PAC01355KG5M	5KG/M2 with WAVE FOAM 5 mtr x 1350mm wide Roll
25PAC06755KG5M	5KG/M2 with WAVE FOAM 5 mtr x 675mm wide Roll

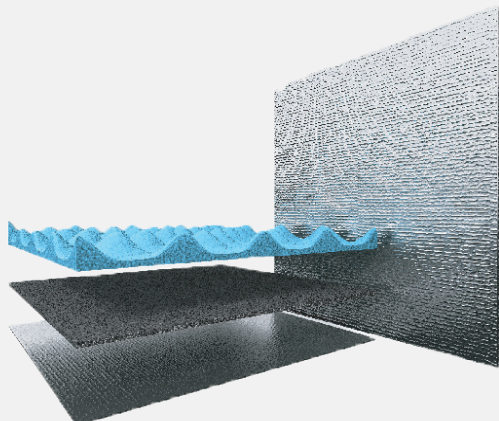

SOUNDLAG BENEFITS

PowAcoustic Soundlag 4525C is a pipe wrap comprising weights of of 5.0 kg/m² to 8kg/m² flexible loaded vinyl noise barrier bonded to 25mm thick flexible convoluted foam. The function of the mass foam is to provide acoustic decoupling between the pipe's noise energy and the 5kg flexible loaded vinyl external wrap, resulting in superior performance. The external face of the vinyl is bonded to an aluminum foil providing a fire resistant covering.

- ✓ Easiest pipelag product on the market to cut, wrap & install
- ✓ Most widely specified by leading acoustic & EMP (electrical, mechanical & plumbing) consultants
- ✓ Highly flexible, allowing it to conform to the smallest dia. Pipes & bends (has no memory)
- ✓ Broad operating temperature range
- ✓ Tested to AS 1530.3 with excellent flame resistance
- ✓ Low spread of flame surface
- ✓ Made in Australia accredited to ISO 9001 Quality Control Standard
- ✓ Endorsed and tested by leading acoustic consultants and engineers combined with independent lab and field testing
- ✓ Available in a range of weights and thicknesses
- ✓ Easy to bond onto other substrates using matching Tape ALR adhesive or equivalent.
- ✓ Both noise barrier & noise absorber
- ✓ Ten year warranty
- ✓ Air-conditioning ducting and shrouds
- ✓ Compressor wraps
- ✓ Spa motor wraps
- ✓ Achieve a high level of noise reduction for all plumbing and hydraulic situation
- ✓ Available world wide



GREEN STAR PRODUCT

Soundlag products are environmentally safe, contain no ozone depleting substances and comply with European and Australia standards for Volatile Organic Compound emissions.

- ✓ The material emissions are less than the "Green Star" threshold of 0.5mg/m²/hr
- ✓ This product is classed as low VOC emitting
- ✓ Free from odour producing oils and bitumen
- ✓ No ozone depleting substances generated during manufacture
- ✓ No odour
- ✓ Non irritant

PowAcoustic Soundlag 4525C

ASTM D5116(Report No. CV 100812)

TVOC Specific area emission rate

0.08mg/m²/hr

NATIONAL DELIVERY • TWICE DAILY DIRECT TO SITE