



## **VIBRAMOUNT**




## **VIBRAMOUNT SPRING ASSEMBLIES**

VibraMount spring mounts offer superior quality and competitive pricing making them the ideal choice for use in the installation of a wide range of machinery such as air conditioners, generating sets, pumps and compressors.

VibraMount springs are made in Australia by a QS-9000 and ISO9002 certified company, complying with the relevant Australian Standards, zinc plated for protection against corrosion, and heat treated to ensure consistent performance characteristics.

#### **SPRING HANGERS**

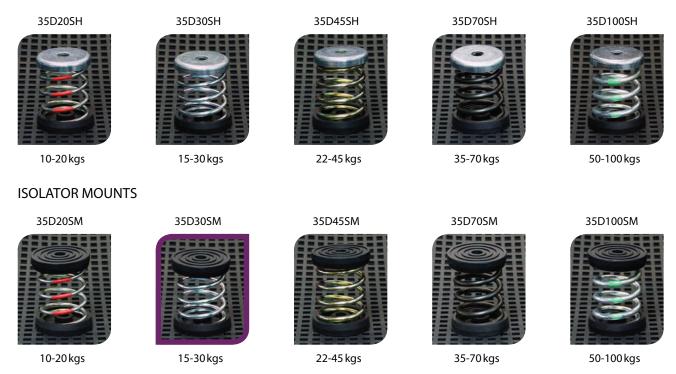


### VIBRAMOUNT SPRING HANGER BOX

The renowned VibraMount Hanger Box from PowAgroup, is made from heavy duty 3mm material, hot dip powder coated.

Part N°	Material	Height	Rating	Box Qty
35SHB-HDG	3mm	140mm	250 kgs	38

The VibraMount Hanger Box has been updated with the new v-cup to insure sturdy placement and

centralised threaded rod location.



35SHB-HDG





## **NEOPRENE MOUNTS**

Where a low cost mounting is required for the effective isolation of noise and vibration from machinery, particularly with speeds from about 1,000 RPM (16 R/s) upwards, and also from wall mounted machinery such as air conditioning/refrigeration condensers. Neoprene mounts are the preferred choice because Neoprene is more durable than natural rubber and cheaper synthetic compounds. The mounts are recommended for use in compression only.

#### **DOUBLE DEFLECTION NEOPRENE MOUNT**

The bases for NM-A and NM-B are 76mm square, providing excellent stability, and have 7.5mm holes at each of the four corners, offering a choice of fixing options.

The NM-A stand 41mm high and the NM-B are 50mm high. The NM-A are supplied with M8 screws and washers fitted and the NM-B have M10 screws and washers fitted.

- Moulded in oil-resistant Neoprene.
- · Zinc plated screws and washers are fitted.
- Corrosion-free metal parts embedded in Neoprene.
- Non-skid base fixing to foundation not normally required.
- Two sizes for compression loads from 7-100 Kgs and 30-300 Kgs



Part N°	Rating	Bolt + Washer	Size	Box Qty	Ctn Qty
35NM-A-WHITE	7-20 kgs	Supplied	M8	75	150
35NM-A-RED	15-40 kgs	Supplied	M8	75	150
35NM -A-GREEN	30-60 kgs	Supplied	M8	75	150
35NM-A-BLUE	50-100 kgs	Supplied	M8	75	150



Part N°	Rating	Bolt + Washer	Size	Box Qty	Ctn Qty
35NM-B-RED	30-70 kgs	Supplied	M10	50	100
35NM-B-GREEN	50-100 kgs	Supplied	M10	50	100
35NM-B-BLUE	80-160 kgs	Supplied	M10	50	100
35NM-B-YELLOW	150-300 kgs	Supplied	M10	50	100

#### **NEOPRENE WALL BRACKET MOUNT**

These double deflection Neoprene mounts have been made specifically to fit on the wall mounting brackets

made by PowAgroup, and others. The bases are about 45mm wide and 88mm long with two bolt holes (9.8 mm) in the base at 64mm centres. They have an unladen height of 37mm and settle down to between 32 mm and 28 mm depending upon the load.

- Moulded in oil-resistant Neoprene.
- Zinc plated M8 screws and washers are fitted.
- Corrosion-free metal parts embedded in Neoprene.
- · Non-skid base fixing to foundation not normally required.
- For compression loads from 15-30 Kgs and 90-180 Kgs

Part N°	Rating	Bolt + Washer	Size	Box Qty	Ctn Qty
35WBM -A-RED	15-30 kgs	Supplied	M8	100	200
35WBM -A-GREEN	25-50 kgs	Supplied	M8	100	200
35WBM -A-BLUE	40-80 kgs	Supplied	M8	100	200
35WBM -A-YELLOW	90-180 kgs	Supplied	M8	100	200



# **VIBRAMOUNT**



## **VIBRAMOUNT SEISMIC MOUNTS**

PowAGroup can supply a large range of seismic mounts, suited to a wide variety of applications.



Call PowAGroup today, and find out more about VibraMount!

> **CALL NOW** 1300 303



1300 664 362