


POWAGroup

Pressure PVC Pipe

For Aircon Drain - 16mm, 20mm, 25mm, 32mm

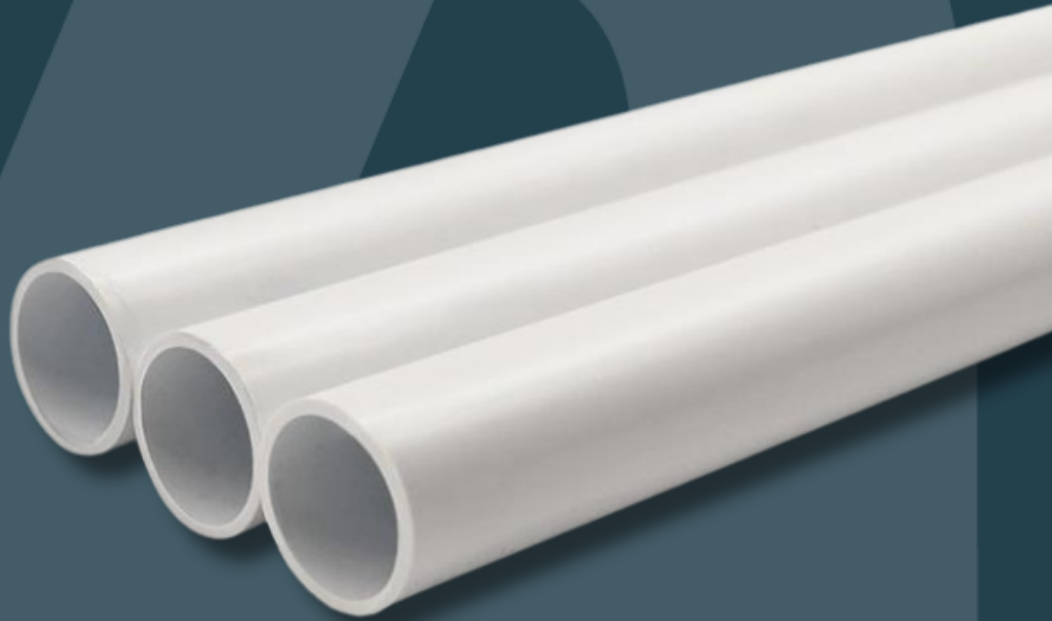

PRESSURE PVC PIPE

For Aircon Drain - 16mm, 20mm, 25mm, 32mm



KEY FEATURES

- Composed of high grade materials.
- Rated to PN12 (Class 12)
- Commonly used in HVAC applications for condenser drains

TECHNICAL DATA

15 PN 18 PRESSURE 6 MTR		
DIMENSIONS	MIN (mm)	MAX (mm)
Pipe Wall Thickness	1.6	2.0
Ovality	21.1	21.6
Mean Diameter	21.2	21.5
Effective Length	6000	6010
Socket Length	35	38
Pack Size	1045 Lengths	-
Pressure Rating	PN 18	

25 PN 12 PRESSURE 6 MTR		
DIMENSIONS	MIN (mm)	MAX (mm)
Pipe Wall Thickness	1.7	2.1
Ovality	33.3	33.8
Mean Diameter	33.4	33.7
Effective Length	6000	6010
Socket Length	38	40
Pack Size	540 Lengths	5 Per Bundle
Pressure Rating	PN 12	

20 PN 12 PRESSURE 6 MTR		
DIMENSIONS	MIN (mm)	MAX (mm)
Pipe Wall Thickness	1.4	1.7
Ovality	26.5	27.0
Mean Diameter	26.6	26.9
Effective Length	6000	6010
Socket Length	35	40
Pack Size	770 Lengths	-
Pressure Rating	PN 12	

32 PN 12 PRESSURE 6 MTR		
DIMENSIONS	MIN (mm)	MAX (mm)
Pipe Wall Thickness	2.2	2.6
Ovality	42.0	42.5
Mean Diameter	42.1	42.4
Effective Length	6000	6010
Socket Length	35	40
Pack Size	300 Lengths	5 Per Bundle
Pressure Rating	PN 12	