


POWA Group

Technical Data Sheet

Slotted Strut

Light Duty Galvabond


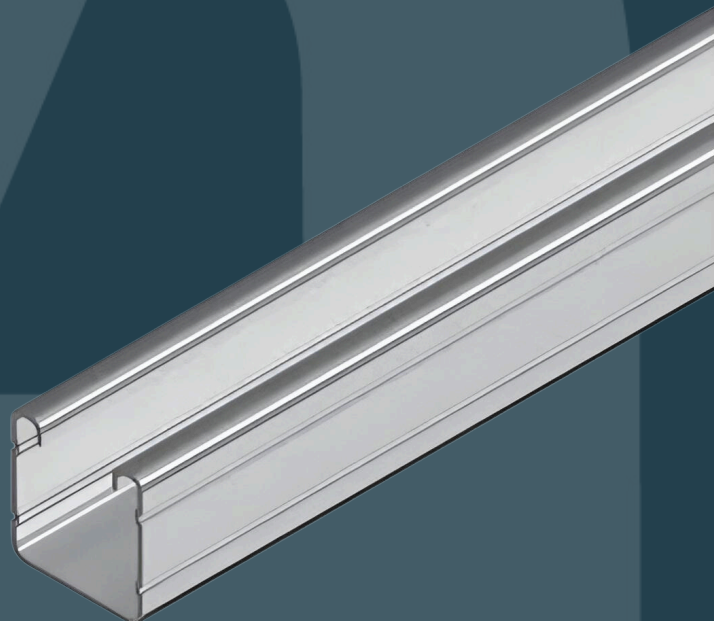


Slotted Strut

Light Duty Galvabond



41mm x 21mm

- Length: 6 metres
- Thickness: 1.6mm
- Profile: 41 x 21mm

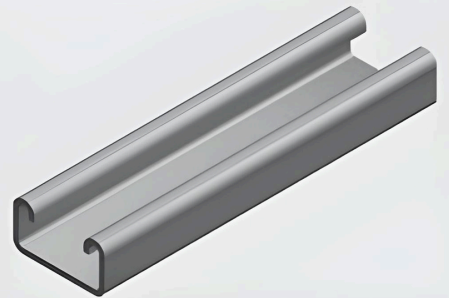

41mm x 41mm

- Length: 6 metres
- Thickness: 1.6mm
- Profile: 41 x 41mm

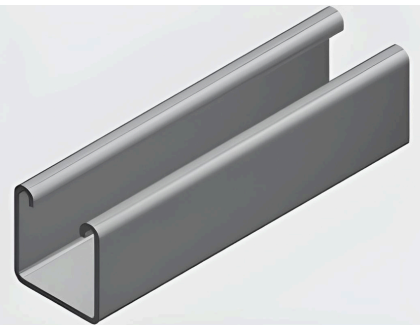

Manufactured from strip steel to the following AS standards:

- Mild Steel & Hot Dip Galvanised to AS/NZS1365, AS1594, AS/NZS4680, ISO1461
- Pre-Galvanised to AS1397

Slotted Strut Light Duty Galvabond

Product Code

41mm x 21mm x 1.6mm x 3mtrs

09SLL203

41mm x 21mm x 1.6mm x 6mtrs

09SLL206

41mm x 41mm x 1.6mm x 3mtrs

09SLL403

41mm x 41mm x 1.6mm x 6mtrs

09SLL406

Slotted Strut

Light Duty Galvabond



Load Rating & Deflection: 41mm x 21mm

Span (mm)	Max. Allowable Load (kg)	Deflection at Allowable Load (mm)
250	350	0.31
500	175	1.22
750	116	2.76
1000	88	4.89
1250	70	7.65
1500	58	11.02
1750	50	15.00
2000	44	19.59
2250	39	24.82
2500	35	30.61
2750	32	37.04
3000	30	44.15

Load Rating & Deflection: 41mm x 41mm

Span (mm)	Max. Allowable Load (kg)	Deflection at Allowable Load (mm)
250	1308	0.17
500	654	0.68
750	436	1.53
1000	328	2.72
1250	261	4.25
1500	218	6.13
1750	187	8.34
2000	163	10.90
2250	145	13.80
2500	131	17.03
2750	119	20.61
3000	109	24.56